
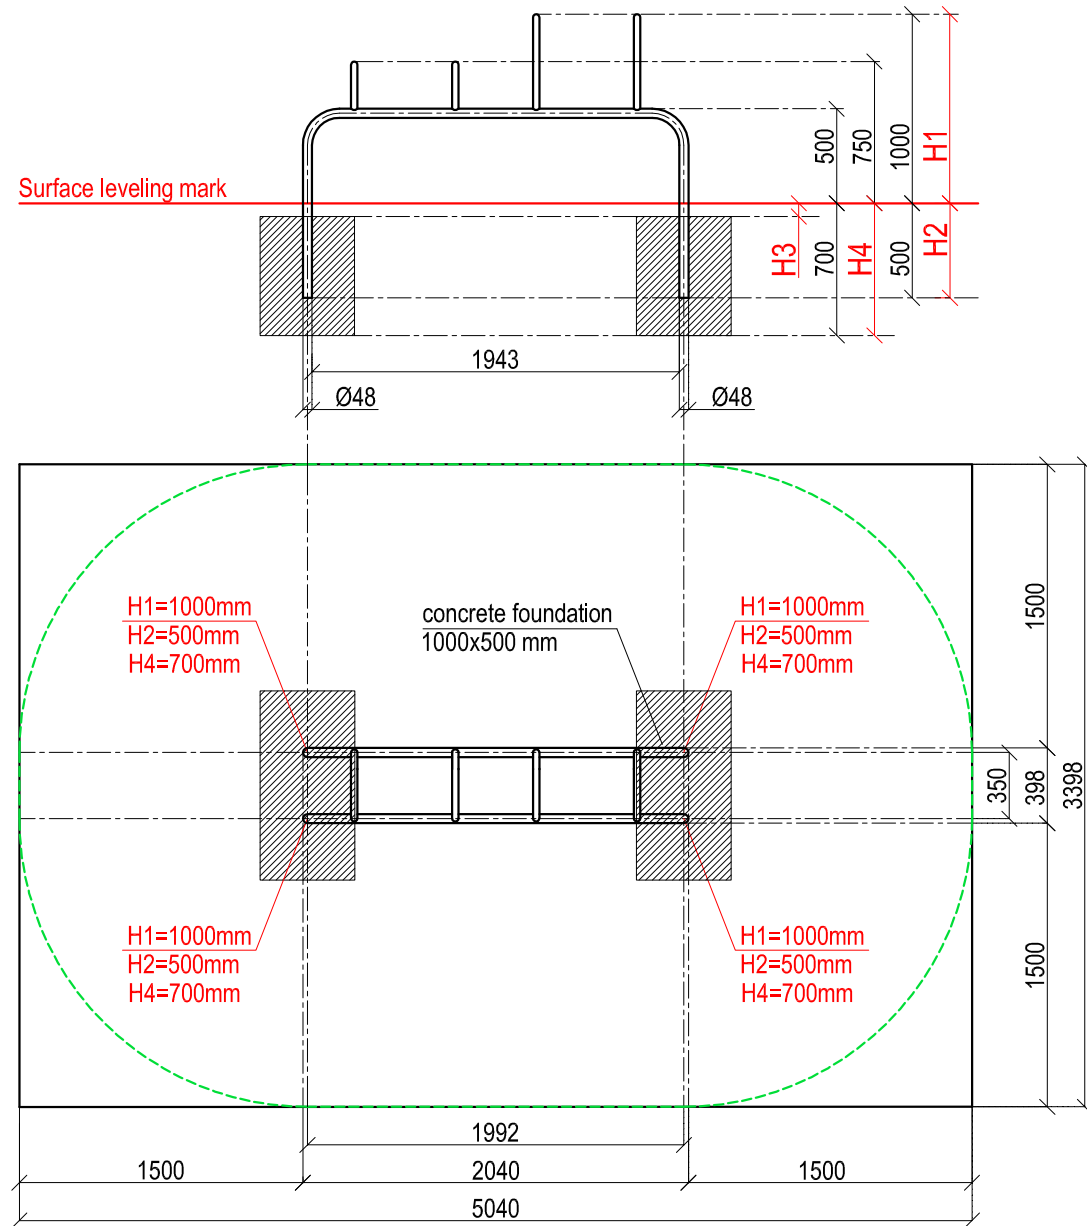



SCALE 1:40



LTD "KENGURU PRO"
 Address: Lauteres street 4, Riga, Latvia, LV-1002
 VAT Reg. No. 40103750152
 Bank: A/S DNB bank, SWIFT: RIKOLV2X ,
 Bank Account: LV65RIKO0002930161161
 e-mail: info@kengurupro.eu
 www.kengurupro.eu

K-011

Workout desk

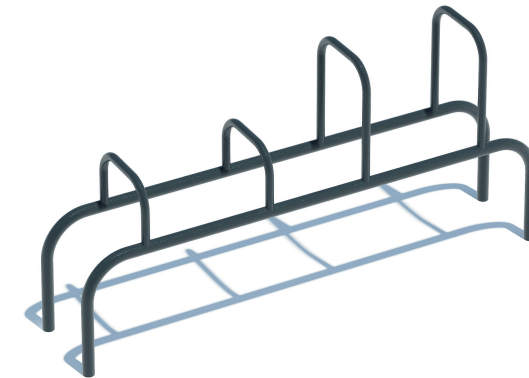

This is a metallic construction with base horizontal surface 2040 mm in length, 400 mm in width, and 500 mm in height. The construction has four semi-rings between which there is a distance of 500 mm, 394 mm and 500 mm accordingly. The height of the semi-rings: 250 mm and 250 mm, 500 mm and 500 mm. The construction consists of tubes with diameter from 34 mm to 50 mm. Weight 53 kg

Installation instructions:

- Choose a suitable underground for the unit (see page 2, table 2)!
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m³ concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the K-011 Workout desk				Technical information		
Foundation when using Shock absorbing underground (syntetic – rubber granulates)		Beveling of foundation when using loose filling material		width:	398 mm	
				height:	1000 mm	
				length:	2040 mm	
				largest part:	2040 mm	
				weight:	53 kg	
				floor space required:	3398 x 5040 mm	
				pipe measurements:	diameter:	wall thickness:
					48.3 mm	3.2 mm
					33.7 mm	3.2 mm
				metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)	
				metal clamps:	aluminium, powder coated, RAL 2004 (pure orange)	
				bolts for metal clamps:	stainless steel, Pin Hex Button Head Security Screws M10	
				max. free fall height:	< 1000 mm	possible underground see DIN 79000:2012-05 Tab.2 or installation instructions
				user height:	> 140 cm	
				maximum user weight:	130 kg	
				certificates:	TÜV Rheinland InterCert Kft.	

