
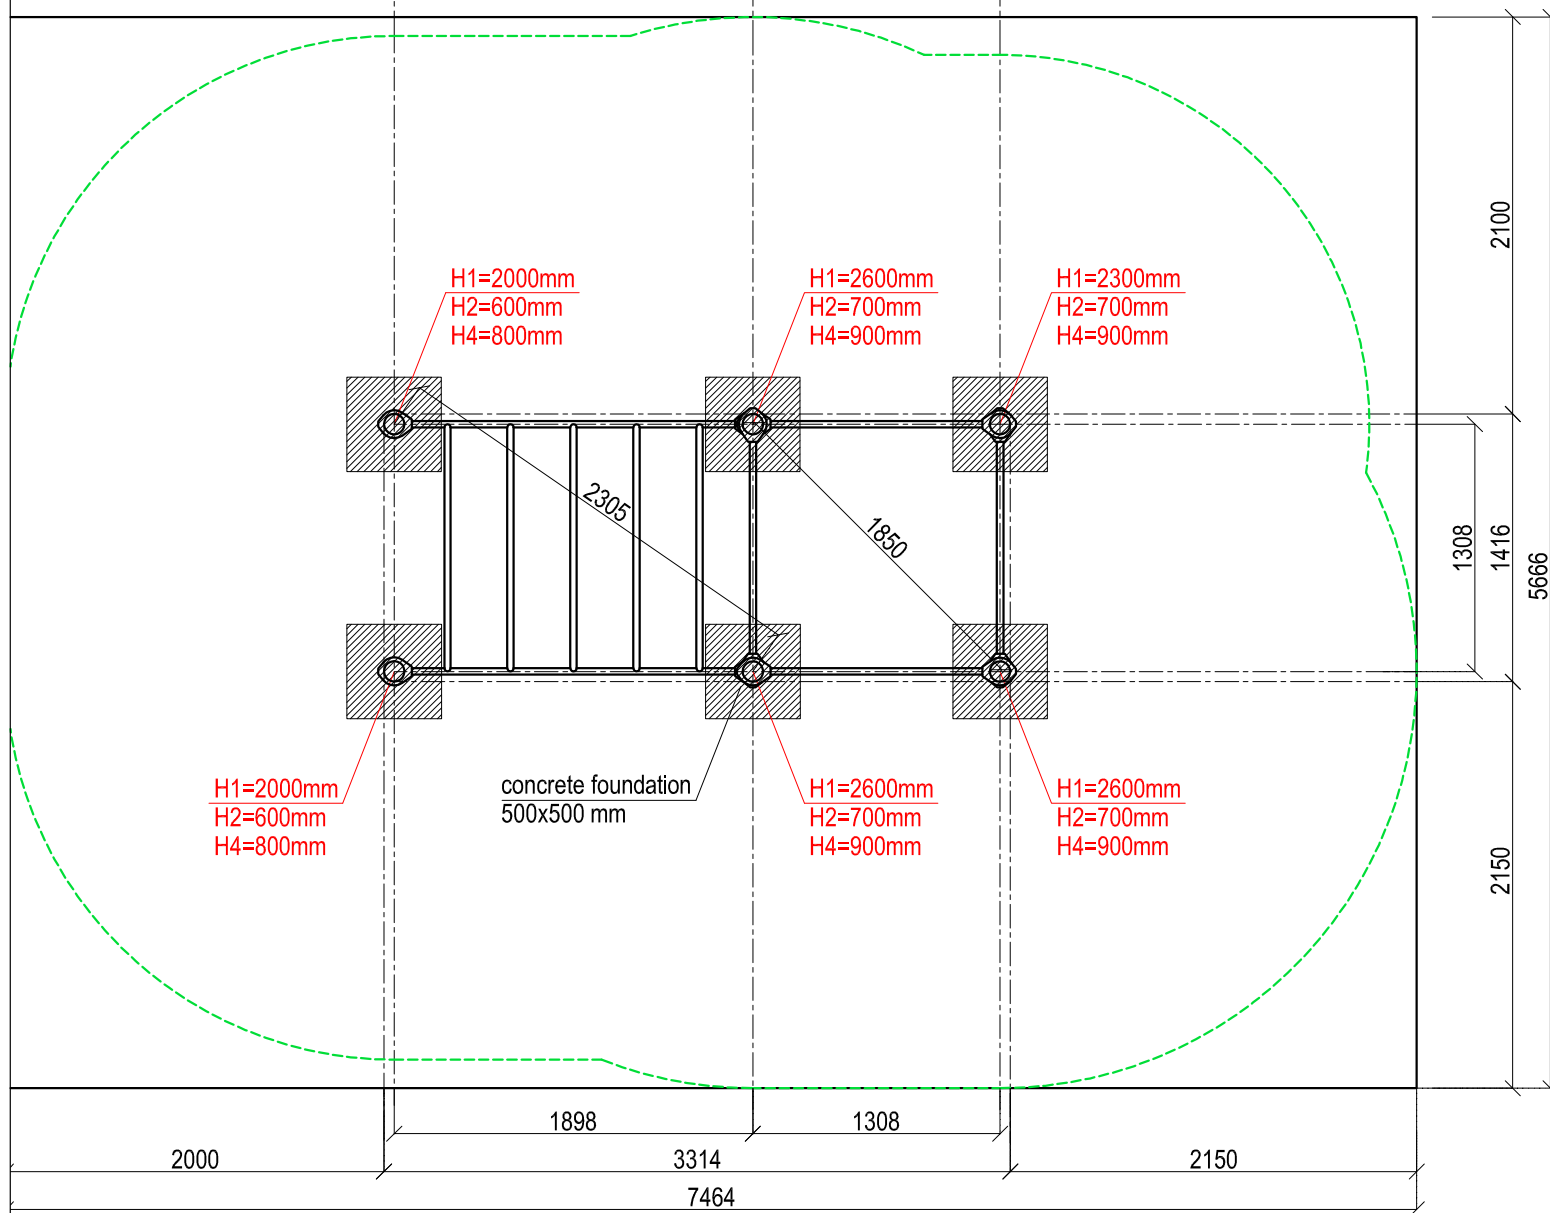



SCALE 1:40

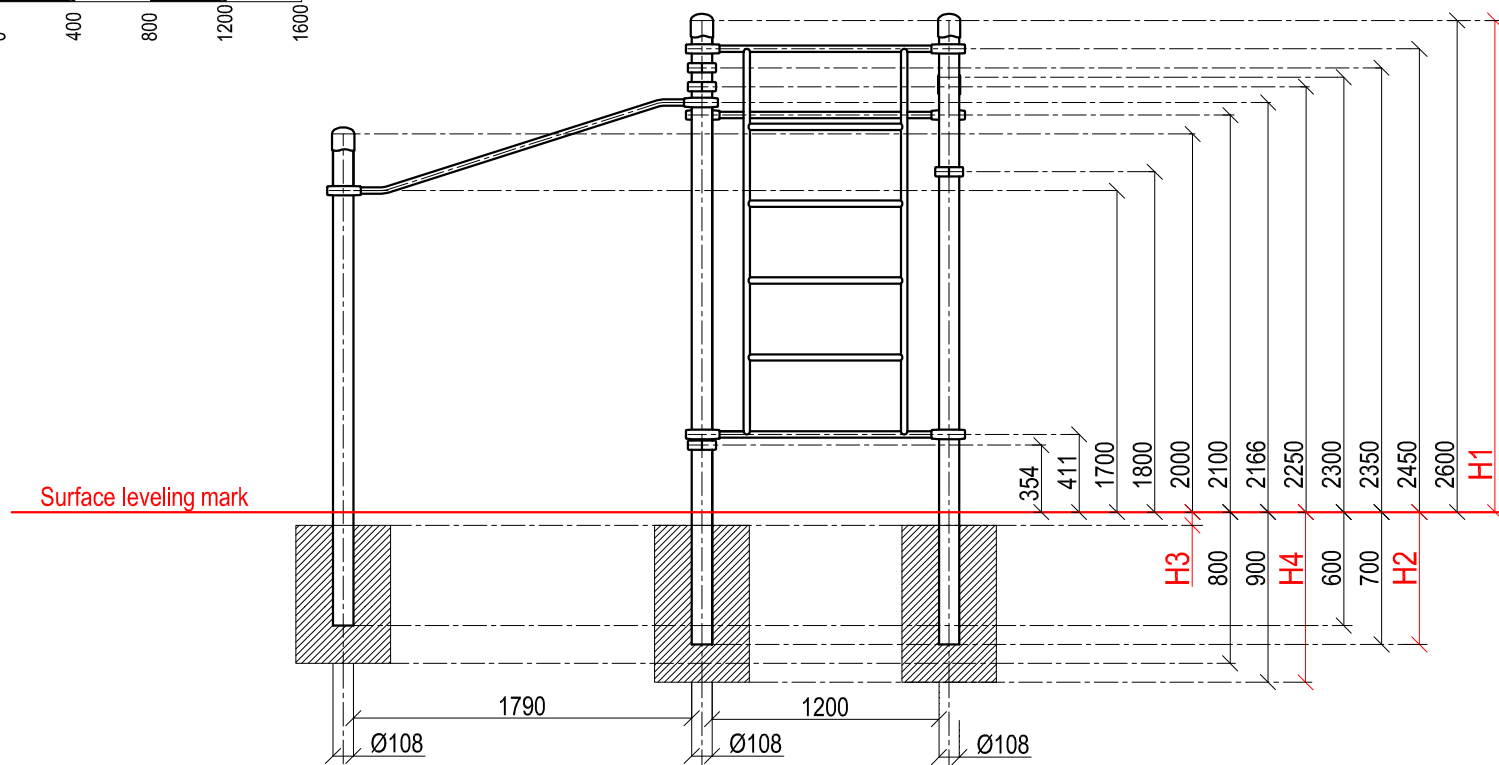

LTD "KENGURU PRO"  
 Address: Lauteres street 4, Riga, Latvia, LV-1002  
 VAT Reg. No. 40103750152  
 Bank: A/S DNB bank, SWIFT: RIKOLV2X,  
 Bank Account: LV65RIKO0002930161161  
 e-mail: info@kengurupro.eu  
 www.kengurupro.eu

P-012

PARA complex MIN

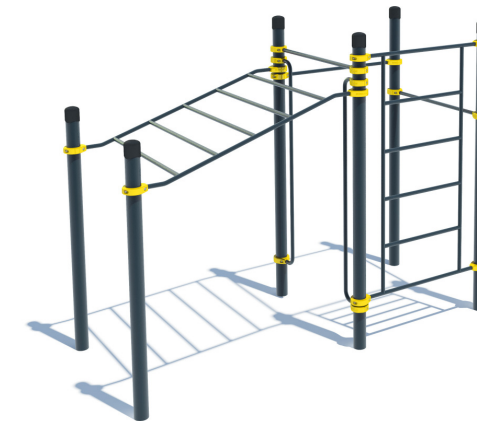

The complex consists of six vertical columns of different height, one inclined monkey bar, one Swedish wall section, two crossbars 1200mm in length and two climb-down bars 1930mm in height. The length of inclined monkey bar - 1790 mm. The distance between the crossbars of inclined monkey bar is 350 mm. Height difference for the inclined monkey bar section is 466,3mm Construction is secured together with aluminium clamps. Weight - 286,10 kg

**Installation instructions:**

- Choose a suitable underground for the unit (see page 2, table 2)!
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m<sup>3</sup> concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

| Foundation plan and area of movement of the P-012 PARA complex MIN                |  |  |  | Technical information   |  |
|---|--|--|--|-------------------------|--|
| Foundation when using Shock absorbing underground (syntethic – rubber granulates) |  | Beveling of foundation when using loose filling material |  | width:                  | 1416 mm  |
|   |  |  |  | height:                 | 2650 mm  |
|   |  |  |  | length:                 | 3314 mm  |
|   |  |  |  | largest part:           | 3350 mm  |
|   |  |  |  | weight:                 | 286,10 kg  |
|   |  |  |  | floor space required    | 7464 x 5666 mm   |
|   |  |  |  | pipe measurements:      | diameter: 108 mm<br>wall thickness: 3.2 mm   |
|   |  |  |  | metal parts:            | steel, galvanized, powder coated RAL 7016 (anthracite grey)                                |
|   |  |  |  | metal clamps:           | aluminium, powder coated, RAL 2004 (pure orange)   |
|   |  |  |  | bolts for metal clamps: | stainless steel, Pin Hex Button Head Security Screws M10                                   |
|   |  |  |  | max. free fall height:  | < 2450 mm<br>possible underground see DIN 79000:2012-05 Tab.2 or installation instructions |
|   |  |  |  | user height:            | > 140 cm   |
|   |  |  |  | maximum user weight:    | 130 kg   |
|   |  |  |  | certificates:           | TÜV Rheinland InterCert Kft.   |

