
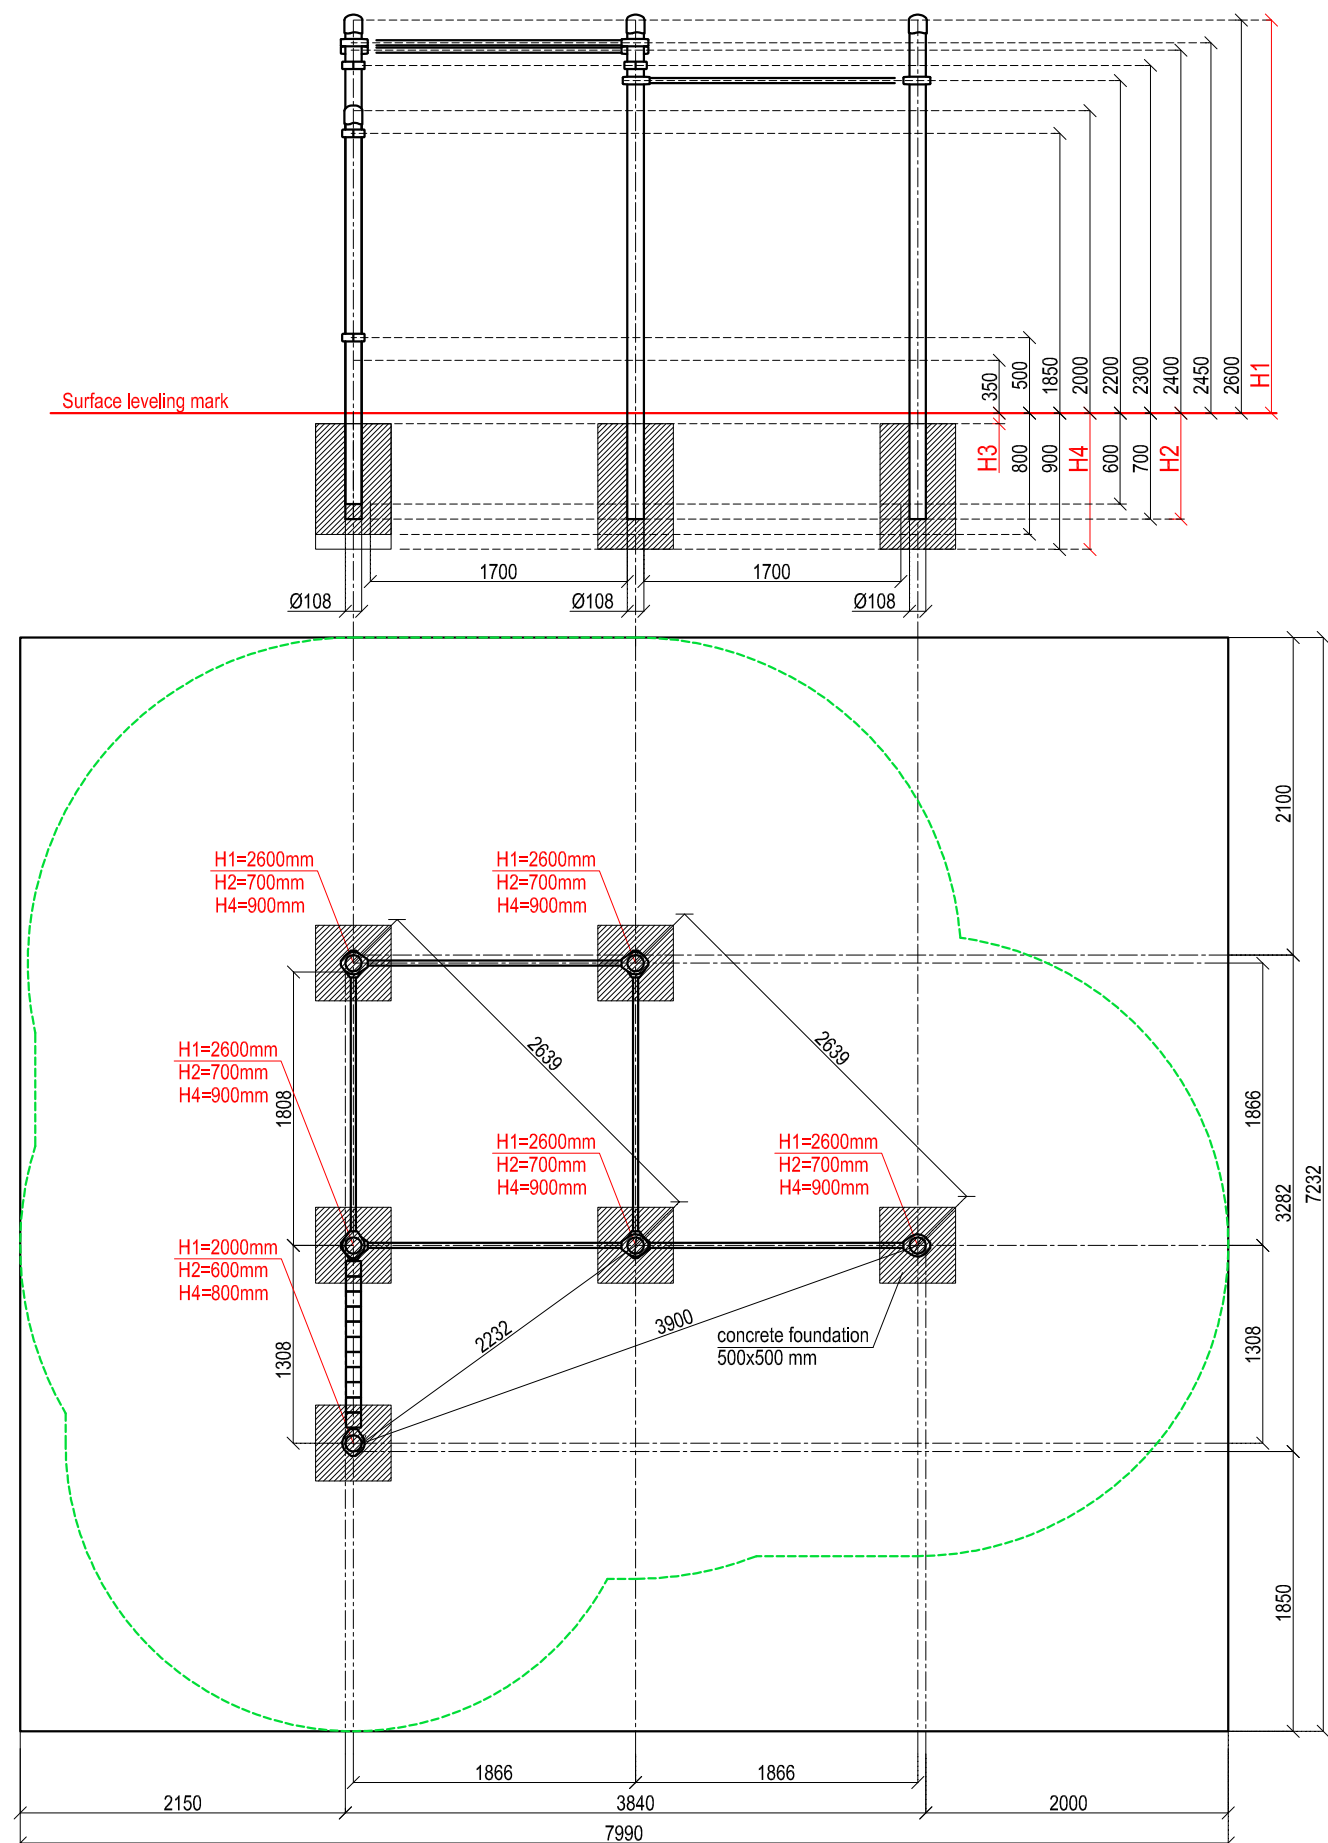



SCALE 1:50



LTD "KENGURU PRO"
 Address: Lauteres street 4, Riga, Latvia, LV-1002
 VAT Reg. No. 40103750152
 Bank: A/S DNB bank, SWIFT: RIKOLV2X ,
 Bank Account: LV65RIKO0002930161161
 e-mail: info@kengurupro.eu
 www.kengurupro.eu

PK-006

Kenguru PARKOUR

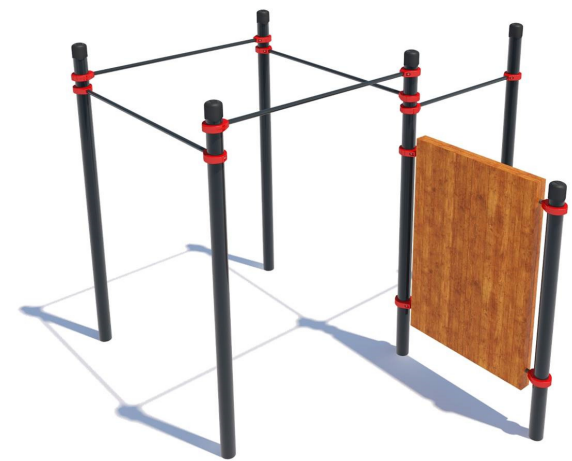

The construction consists of six vertical columns with different height, wooden wall section and five crossbars 1758 mm in length. The wall is mounted on two crossbars 1200mm in length. Height of the wall is 1650mm. Construction is secured together with aluminium clamps at the height that corresponds to the wishes of the Client. Weight - 349.00 kg

Installation instructions:

- Choose a suitable underground for the unit (**see page 2, table 2!**)
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m³ concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the Kenguru PARKOUR complex PK-006				Technical information	
Foundation when using Shock absorbing underground (synthetic – rubber granulates)		Beveling of foundation when using loose filling material		width:	3282 mm
				height:	2650 mm
				length:	3840 mm
				largest part:	3350 mm
				weight:	349.00 kg
				floor space required	7232 x 7990 mm
				pipe measurements:	diameter: wall thickness:
					108 mm 3.2 mm
					33.7 mm 3.2 mm
				metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)
				metal clamps:	aluminium, powder coated, RAL 2004 (pure orange)
				bolts for metal clamps	stainless steel, Pin Hex Button Head Security Screws M10
				wooden beam measurements:	Height, width Length
					92 x 100 1650
				wooden parts:	SAYERLACK painted, NCS S3030-Y30R
				max. free fall height:	< 2450 mm possible underground see DIN 79000:2012-05 Tab.2 or installation instructions
				user height:	> 140 cm
				maximum user weight:	130 kg
				certificates:	TÜV Rheinland InterCert Kft.

