
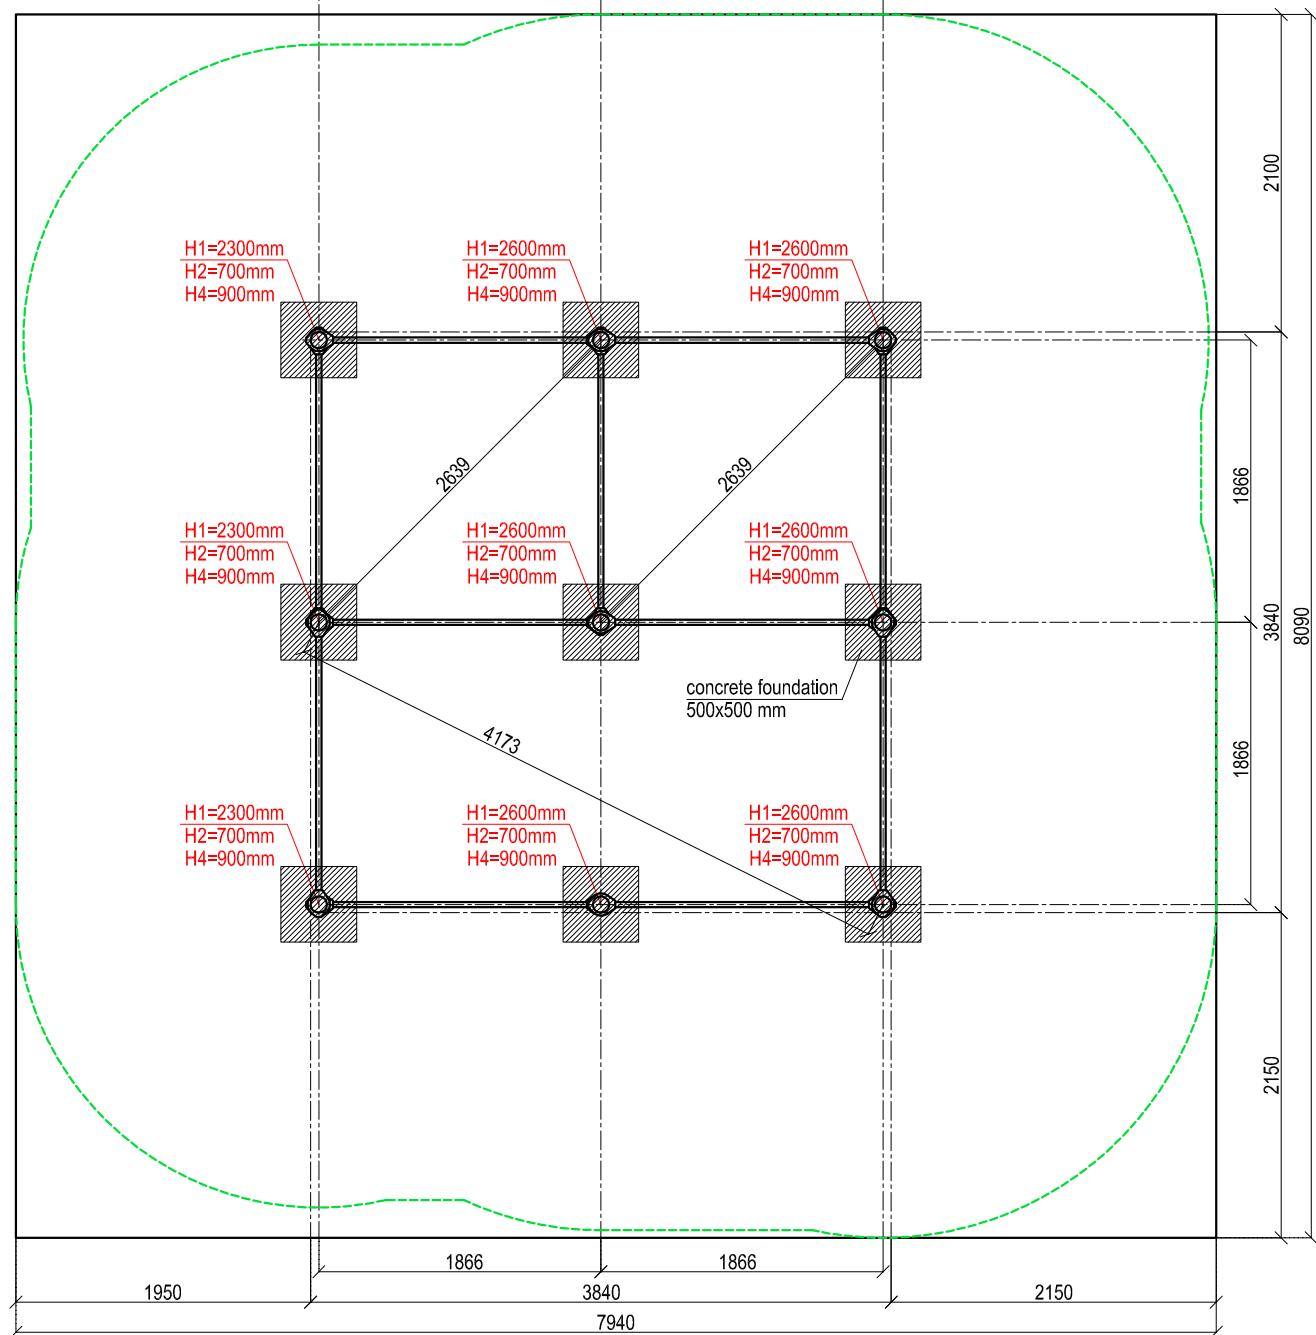
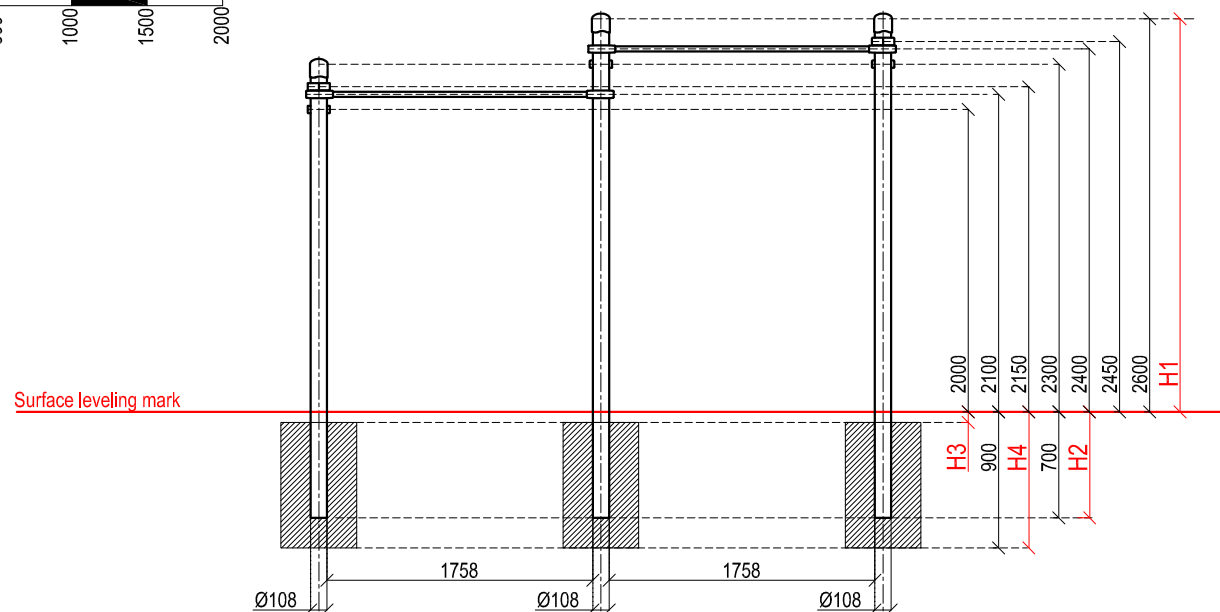



SCALE 1:50



LTD "KENGURU PRO"
 Address: Lauteres street 4, Riga, Latvia, LV-1002
 VAT Reg. No. 40103750152
 Bank: A/S DNB bank, SWIFT: RIKOLV2X ,
 Bank Account: LV65RIKO0002930161161
 e-mail: info@kengurupro.eu
 www.kengurupro.eu

PK-010

Kenguru PARKOUR

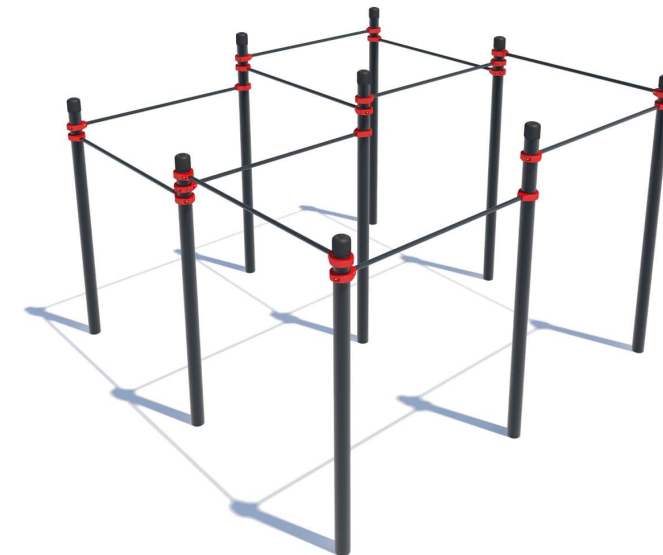

The construction consists of nine vertical columns with different height and eleven crossbars 1758 mm in length. Construction is secured together with aluminium clamps at the height that corresponds to the wishes of the Client. Weight - 358.90 kg

Installation instructions:

- Choose a suitable underground for the unit (see page 2, table 2)!
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m³ concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

Foundation plan and area of movement of the Kenguru PARKOUR complex PK-010				Technical information					
Foundation when using Shock absorbing underground (syntetic – rubber granulates)		Beveling of foundation when using loose filling material		width:	3840 mm				
				height:	2650 mm				
H3	Drop height	H3	Drop height	length:	3840 mm				
40 mm	> 1.2.....1.4 m	20 cm	< 1.0 m	largest part:	3350 mm				
50 mm	> 1.5.....1.7 m	30 cm	< 2.0 m	weight:	358.90 kg				
60 mm	> 1.8.....2.0 m	40 cm	< 3.0 m	floor space required	7940 x 8090 mm				
70 mm	> 2.1.....2.5 m			pipe measurements:	diameter:	108 mm	wall thickness:	3.2 mm	
								33.7 mm	3.2 mm
				metal parts:	steel, galvanized, powder coated RAL 7016 (anthracite grey)				
				metal clamps:	steel, powder coated, RAL 2004 (pure orange)				
				bolts for metal clamps:	stainless steel, Pin Hex Button Head Security Screws M10				
				max. free fall height:	< 2450 mm	possible underground see DIN 79000:2012-05 Tab.2 or installation instructions			
				user height:	> 140 cm				
				maximum user weight:	130 kg				
				certificates:	TÜV Rheinland InterCert Kft.				

